



Characteristics




- Equipped with EC-fans of low consume that save up to 45% of the energy without decreasing the airflow.
- Self-supporting casing construction made of galvanized plated steel, ready to be installed recessed in a false ceiling.
- The inlet grille and blow-out nozzle are integrated in a single white frame, colour RAL 9016. Other colours are available on request.
- Low noise centrifugal double inlet fans driven by an external rotor motor with built in thermal protection contact. Provided by five speed selection.
- "P" type includes water heated coils. "E" type includes electrical shielded elements, three power stages with power switches included. "A" type is without heating, air only.
- Anodised aluminium blow-out vanes, airfoil shaped, pitch angle adjustable each side.
- Control panel and 20m of telephonic cable with fast connectors type RJ45 (Plug & Play), included. Optional: Interface to connect to BMS.

Specifications

Model	Airflow m ³ /h	Heating Capacity 80/60°C kW	Water Drop Pressure 80/60°C Pa	Water Connections 80/60°C	Heating Capacity 60/40°C kW	Water Drop Pressure 60/40°C Pa	Water Connections 60/40°C	Electrical Heating Capacity 3x400V-50Hz kW	Fans Power 230V-50Hz kW	Fans Current 230V-50Hz A	Noise Level (3 m) dB(A)	Weight kg
REC 1000 A	2700	-	-	-	-	-	-	-	0,279	1,86	55	55
REC 1000 P86	2610	12,85	1260	2x3/4"	-	-	-	-	0,279	1,86	55	61
REC 1000 P64	2610	-	-	-	11,06	6530	2x3/4"	-	0,279	1,86	55	61
REC 1000 E	2700	-	-	-	-	-	-	3/6/9	0,279	1,86	55	63
REC 1500 A	3600	-	-	-	-	-	-	-	0,372	2,48	56	80
REC 1500 P86	3480	18,71	1010	2x3/4"	-	-	-	-	0,372	2,48	56	89
REC 1500 P64	3480	-	-	-	16,35	9010	2x3/4"	-	0,372	2,48	56	89
REC 1500 E	3600	-	-	-	-	-	-	4/8/12	0,372	2,48	56	93
REC 2000 A	5400	-	-	-	-	-	-	-	0,558	3,72	57	106
REC 2000 P86	5220	28,52	2950	2x3/4"	-	-	-	-	0,558	3,72	57	117
REC 2000 P64	5220	-	-	-	23,64	7520	2x3/4"	-	0,558	3,72	57	117
REC 2000 E	5400	-	-	-	-	-	-	6/12/18	0,558	3,72	57	124
REC 2500 A	6300	-	-	-	-	-	-	-	0,651	4,34	58	118
REC 2500 P86	6090	35,32	5500	2x3/4"	-	-	-	-	0,651	4,34	58	129
REC 2500 P64	6090	-	-	-	28,35	5810	2x3/4"	-	0,651	4,34	58	129
REC 2500 E	6300	-	-	-	-	-	-	6/12/18	0,651	4,34	58	138
REC 3000 A	7200	-	-	-	-	-	-	-	0,744	4,96	59	138
REC 3000 P86	6960	42,06	9170	2x3/4"	-	-	-	-	0,744	4,96	59	149
REC 3000 P64	6960	-	-	-	33,95	9740	2x3/4"	-	0,744	4,96	59	149
REC 3000 E	7200	-	-	-	-	-	-	8/16/24	0,744	4,96	59	158

Dimensions

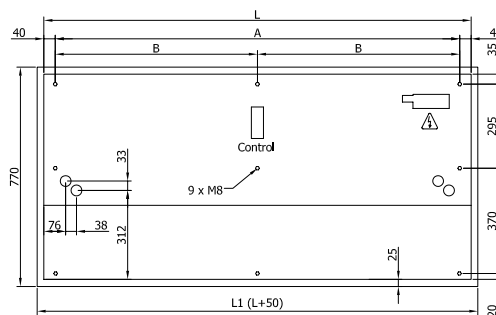

L	L1	A	B
1000	1050	920	-
1500	1550	1420	710
2000	2050	1920	960
2500	2550	2420	1210
3000	3050	2920	1460